




D3G400GG0404 RadiFit

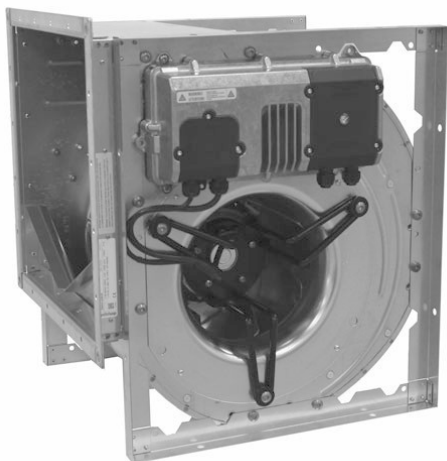

RadiFit-puhaltimessa on energiatehokas EC-moottori, jossa tehdasasennuksena käynti- ja ohjauselektronikka. Tämän ansiosta RadiFit-puhallinta voidaan säätää 0-10 V signaalilla esimerkiksi VAK:lla.

RadiFit on suoravetoinen, molemmin puolin imevä kaavullinen radiaalipuhallin taaksepäin kaartuvien B-siivien.

Moottori on kiinnitetty kaapuun tärinää vaimentavalla ripustuskiinnityksellä.

Erittäin kompakti RadiFit-puhallin soveltuu monipuolisuutensa ansiosta mm. saneerausilmanvaihtoon ja moniin ilmanpoisto- ja LTO-laitteisiin.

Tekniset tiedot

Jännite	3~400 VAC
Taajuus	50 / 60 Hz
Teho	2,38 kW
Nimellisvirta	3,7 A
Kierrosluku	1930 rpm
Ilmavirta	3531.00 l/s
Ilmavirta	12710.0 m3/h
Käyttölämpötila-alue	-25...+40°C
Moottorin tyyppi	M3G112-IA
Moottorin malli	Energiatehokas EC-moottori integroidulla elektronikalla. Kierrosluvun säätö 0-10 V signaalilla.
Moottorisuoja / Suoja	Sisäänrakennettu moottorisuoja hälytysulostulolla.
Suojausluokka	IP 54
Laakerit	Kuulalaakerit
Siipipyörä	Hiljainen siipipyörä taaksepäin kaartuvien siivien. Valmistettu alumiinista.
Runko / kaapu	Galvanoitua teräspeltiä
Jalusta	Galvanoitua terästä
Asennusasento	Akseli vaakasuoraan tai roottori alas päin. Pyynnöstä roottori ylös.
Sähköinen kytkentä	Jakorasia
Koko	400 mm
Paino	44.0 kg
LVI Numero	8025254
Tuotenumero	D3G400GG0404

Katso päivitetty tiedot netistä www.ebmpapst.fi



D3G400GG0404 RadiFit


Tarvikkeet D3G400GG0404 RadiFit

Nimitys	Tuotenumero	Tiedot
RM-ECi	358-RMECI	Yleissäädin potentiometri
RM-ECs	RM-ECs	Yleissäädin potentiometri
RM-ECv	358-RMECV	Yleissäädin potentiometri
Paine-ero- ja virtausmittari	DPC200-EP500	Paine-ero- ja virtausmittari nopeussäätimellä



D3G400GG0404 RadiFit

Ominaiskäyrä

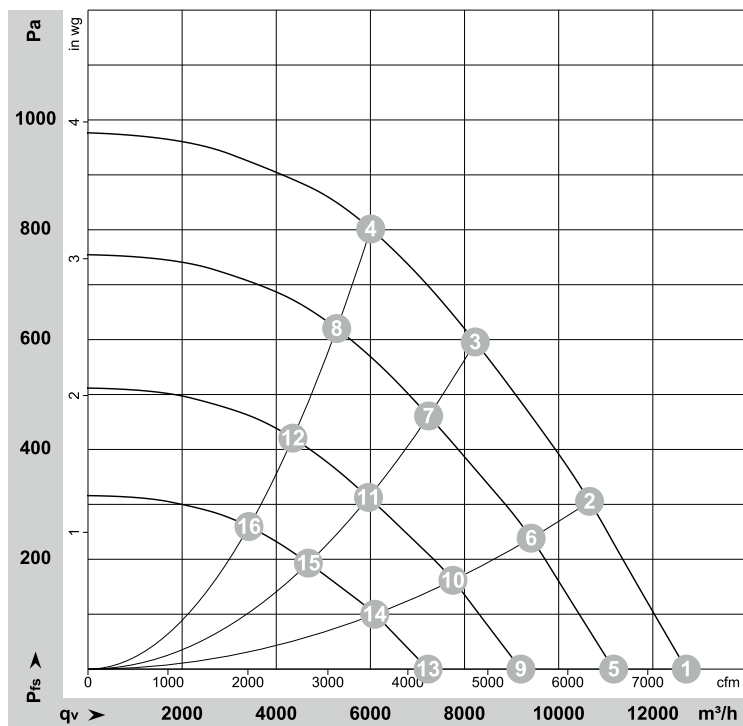

$\rho = 1,15 \text{ kg/m}^3 \pm 2\%$

Measurement: LU-167589

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.



Measured values

	Conn.	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	LwA _{out}	qv	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m ³ /h	Pa
1	Y	400	50	1920	2172	3.39	78	91	95	12710	0
2	Y	400	50	1920	2380	3.70	76	88	92	10655	300
3	Y	400	50	1920	2380	3.70	73	85	89	8230	600
4	Y	400	50	1920	2159	3.38	72	84	88	6010	800
5	Y	400	50	1700	1473	2.30	75	88	92	11170	0
6	Y	400	50	1700	1675	2.60	72	85	89	9415	241
7	Y	400	50	1700	1627	2.53	70	82	86	7235	462
8	Y	400	50	1700	1470	2.30	69	80	84	5285	620
9	Y	400	50	1400	823	1.29	70	83	87	9195	0
10	Y	400	50	1400	935	1.45	68	80	84	7755	163
11	Y	400	50	1400	909	1.41	65	77	81	5960	313
12	Y	400	50	1400	821	1.28	64	76	80	4350	421
13	Y	400	50	1100	399	0.62	64	77	81	7225	0
14	Y	400	50	1100	454	0.70	62	74	78	6090	101
15	Y	400	50	1100	441	0.69	59	71	75	4685	194
16	Y	400	50	1100	398	0.62	58	69	74	3420	260

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed · P_{ed} = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side
LwA_{out} = Sound power level outlet side · qv = Air flow · p_{fs} = Pressure increase




Technical drawing showing the front view of the cabinet. The overall height is 550.6 mm, and the internal height is (275.3) mm. The overall width is 355 mm, and the internal width is (614) mm. A circular hole with a diameter of Ø10.5 is indicated on the right side.

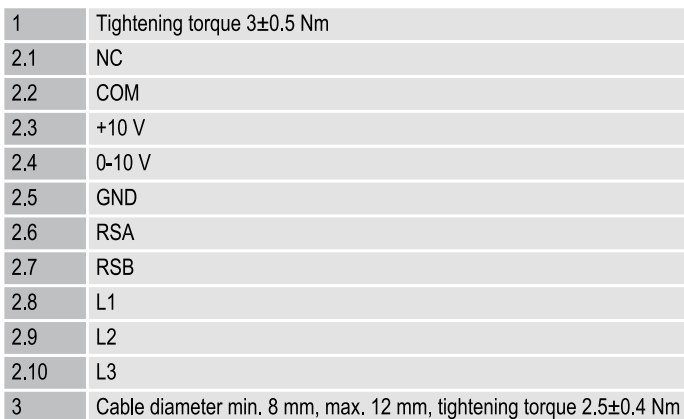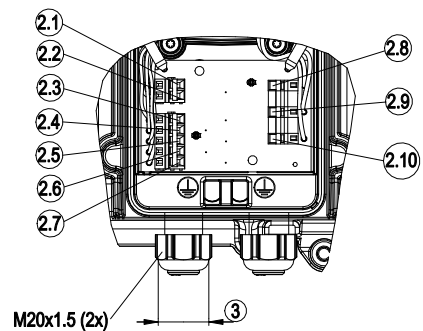



D3G400GG0404 RadiFit

Kytentäkaavio

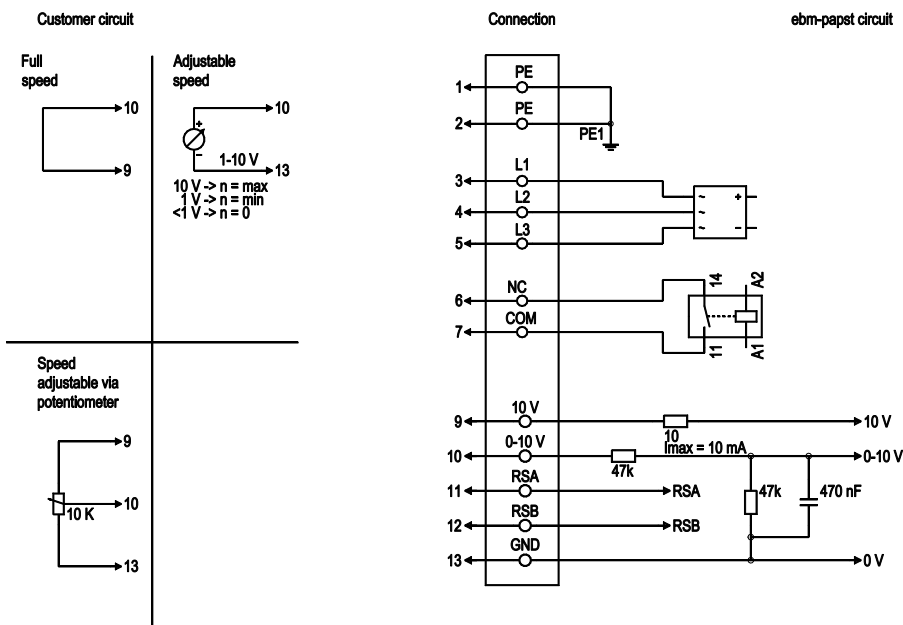

No.	Conn.	Designation	Colour	Function / assignment
1	1, 2	PE		Protective earth
1	3, 4, 5	L1, L2, L3	black	Power supply 50 / 60 Hz
1	6	NC	white 1	Status relay, floating status contact, break for failure; contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on mains side and basic insulation on control interface side (or reinforced insulation on control interface side up to 250 VAC potential difference)
1	7	COM	white 2	Status relay, floating status contact, break for failure; contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on mains side and basic insulation on control interface side (or reinforced insulation on control interface side up to 250 VAC potential difference)
2	9	+10 V	red	Fixed voltage output 10 VDC, SELV, +10 V +/-3%, max. 10 mA short-circuit-proof, power supply for ext. devices (e.g. potentiometer); Fixed voltage input 24 VDC for parameter setting via MODBUS without mains power supply
2	10	0-10 V	yellow	Analogue input (set value) SELV, 0-10 V, Ri=100kΩ, parametrisable curve
2	11	RSA		RS-485 interface for MODBUS, RSA; SELV
2	12	RSB		RS-485 interface for MODBUS, RSB; SELV
2	13	GND		Signal ground for control interface, SELV

Yhteystiedot

ebm-papst Oy

Puistotie 1

02760 Espoo

Puh. (09) 8870 220

Fax (09) 8870 2213

mailbox@ebmpapst.fi

www.ebmpapst.fi